# CITY OF HIGH POINT AGENDA ITEM



Title: HPPD Police Headquarters elevator modernization

From: Eric Olmedo, Assistant City Manager

Public Hearing: No

Attachments: Kone Modernization proposal Bid recommendation form Meeting Date: April 18, 2022 Advertising Date / Advertised By: N/A-

### **PURPOSE**:

Consider a contract with Kone, Inc. to modernize the two existing elevators at the HPPD Headquarters building at 1730 Westchester Drive. The contract amount is for \$282,780.18.

### **BACKGROUND**:

The HPPD Headquarters building located at 1730 Westchester includes two elevators that are original to the building, which was constructed in 1980. Minor upgrades were done to the existing elevators as part of the renovation project, but there was not a full-scale modernization of the mechanical systems. As the units received more use after completion of the renovation and personnel moved into the building, there have been numerous maintenance issues. Kone, Inc. has determined that a complete modernization of the units is needed to increase the reliability and safety of the units. Some of the upgrades will include replacement of all the existing wiring, conduit and duct from the machine room, new door panels and operating systems, light curtains, guide shoes and power units.

### **BUDGET IMPACT:**

The total cost of this contract is \$282,780.18. Existing appropriations in the General Fund have been identified for this contract amount.

### **RECOMMENDATION / ACTIONS REQUESTED:**

Staff recommends and asks the Council to approve the contract with Kone, Inc. in the amount of \$282,780.18.



### U.S. Communities Contract # GENRL-EV2516

Exhibit 4

### KONE Inc. Proposal to Supply Elevator, Escalator, Moving Walkway Maintenance, Repair, Modernization and Related, Products, Services and Solutions under the U.S. Communities Program utilizing the Terms and Conditions of the City of Kansas City Master Contract (Reference GENRL-EV2516 dated December 1st, 2018)

The parties hereby agree to be bound to the Terms and Conditions of the City of Kansas City Master Contract (Reference GENRL-EV2516 dated December 1st, 2018) ("Contract"), together with those terms and conditions contained in this Exhibit 4 (collectively, "Service Agreement"). In the event of conflict between terms and conditions contained in the Contract and this Exhibit 4, the terms in this Exhibit 4 shall supersede and prevail.

### PROPOSED UNITS & EQUIPMENT PRICING:

City of High Point Police Department 1730 Westchester Drive High Point, NC 27262



The following 2022 rates will be utilized for any additional work requested outside the modernization scope of work for the calendar year of 2022. Any work negotiated or required in 2023 shall be subject to the 2023 US Communities rate structure.

IUEC LOCAL UNION NO	CITY/CITIES AND SURROUNDING AREAS		ORMAL IOURS	01	/ERTIME		remium ortion (.7)	SUNDAYS/ HOLIDAYS
80	Greensboro / Raleigh-Durham, NC MECHANIC	\$	193.21	\$	328.46	\$	135.25	\$ 386.43
80	Greensboro / Raleigh-Durham, NC HELPER	s	165.49	s	281.34	s	115.84	\$ 330.98
IUEC LOCAL UNION NO	CITY/CITIES AND SURROUNDING AREAS	PERCENTAGE MARK-UP FOR MATERIALS AND P						
80	Greensboro / Raleigh-Durham, NC	10% profit and 15% overhead from list						

### Price Summary:

Scope of Work	4.5	Price
Base Modernization Bid		\$282,780.18

### Detailed Pricing Breakdown:

US Communities Base Bid Modernization	Hours/Cost	Rate	Sell
Regular Time Mechanic	180 Hours	\$193.21	\$34,777.80
Regular Time Helper	180 Hours	\$165.49	\$29,788.20
Overtime Premium Mech	0 Hours	\$135.25	\$0.00
Overtime Premium Helper	0 Hours	\$115.84	\$0.00
Subcontract Work			\$0.00
Material inclusive of Tax	\$61,459.27	10%+15%	\$76,824.09

### Dedicated to People Flow



Total Per Unit	\$141,390.09
Quantity of Units	2
Total for 3 Units	\$282,780.18

### APPLICABLE LAW

This Agreement shall be construed and enforced in accordance with, and the validity and performance of shall be governed by the laws of the State of North Carolina.

### PAYMENT TERMS


Payments are due 30 days from invoice date, based on work progress as follows:

A. Customer agrees to pay thirty percent (30%) of the Agreement amount including any accepted options and/or alternates upon acceptance of this Agreement.

B. Monthly progress billings may be issued by KONE to cover labor expended and materials stored on or off site during the month.

C. Customer agrees to pay the amount of any tax imposed by any existing law, or by any enacted after the date of this Agreement, based upon the transfer, use, ownership or possession of the equipment involved in the services rendered herein.

D. Final payment shall become due and payable upon completion of the work described in this Agreement. Failure to pay any sum due to KONE within thirty (30) days of the invoice will be a material breach. Simple interest at 1.5% per month will be charged on amounts not paid when due. In the event of default on the payment provisions herein, Customer agrees to pay, in addition to any defaulted amount, all attorney fees, collection costs in connection therewith, and all prejudgment interest.

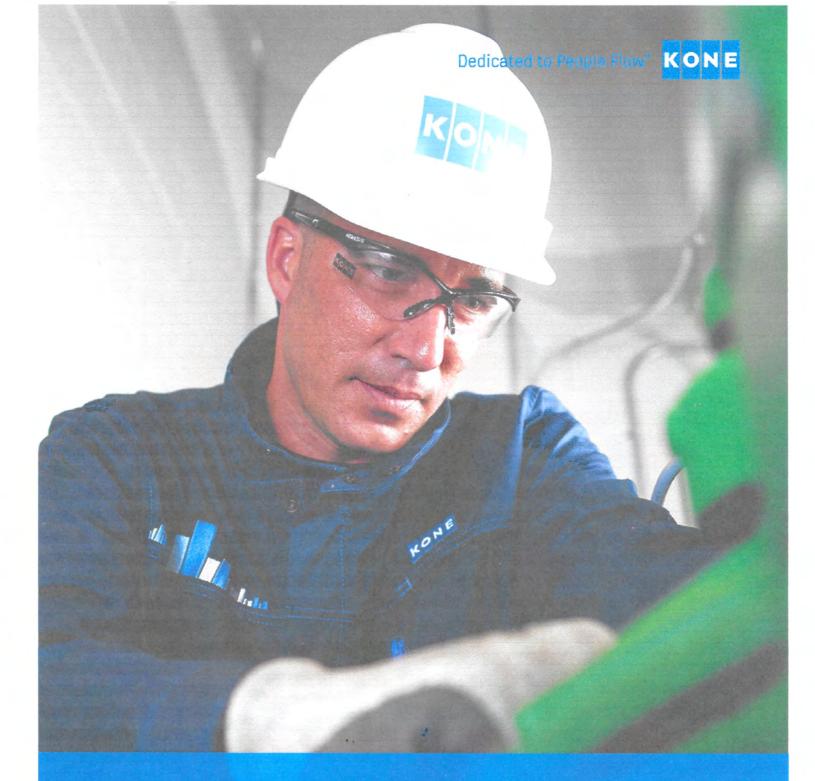

# **KONE MODERNIZATION PROPOSAL**

Proposal: Proposal Date: City of High Point Police Department - Modernization 04/07/2022



City of High Point Police Department 1730 Westchester Drive High Point, NC 27262

Attention: Mr. Eric Davis

Reference: Hydraulic Elevator Modernization

Dear Mr. Davis:

We are pleased to enclose, for your review and consideration, KONE's proposal to modernize your equipment located at the following address for the amount of <u>\$282,780.18</u> (incl. use tax):

High Point Police Department, 1730 Westchester Drive, High Point, NC 27262

- This proposal is based on 2022 installation.
- This proposal is valid for (30) days.
- Anticipated downtime: +/- 4 weeks per unit for modernization + 1 week for inspection.

Please know that we are available to assist you in coordinating the work by others as further described in our "Bid Attachment B". Should you have any questions or require additional information, please feel free to contact me directly.

We look forward to hearing from you and working together on this project.

Yours sincerely,

Mark adams

Mark Adams Senior Sales Executive

04/07/2022

KONE Inc. Elevators & Escalators

1501 Center Park Drive Charlotte, NC, 28217 Mobile (504) 206-7930 mark.adams@kone.com www.kone.us



### **Table of Contents**

1.	Why KONE?	4
2.	Ensuring your project success	5
	Project Overview	5
	Site Cornerstones	5
3.	Your solution	6
	Solution details	9
	Elevator / Solution 1	9
	Elevator / Solution 1	14
4.	Commercial Offer	
	Pricing	19
	Additional Options for your Consideration	
5.	Services included	20
6.	Tender Approval	21

Appendix 1: KONE 24/7 Connected Services Appendix 2: Clarifications Appendix 3: Bid Attachment "A" / KONE Inc. General Terms and Conditions (Modernization) Appendix 4: Bid Attachment "B" / Site Requirements & Work by Other Trades


T-0005443118

40 ×



### 1. Why KONE?

### **KONE** in brief

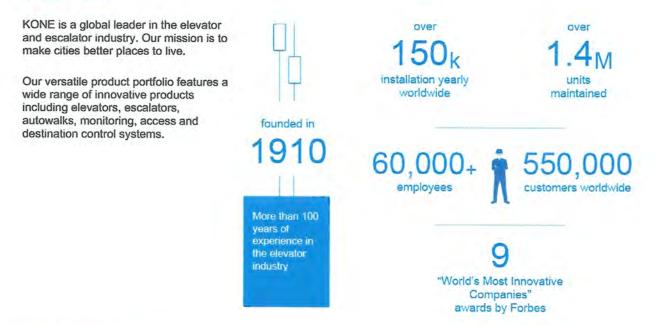

### Value for your project

KONE helps you to reduce operational costs, increase end-user satisfaction and value of your building by providing accessible and safe equipment through a professional and trouble-free modernization project.

- Increased user satisfaction/minimal disturbance to end-users
- / Improved eco-efficiency, reduced energy consumption




Improved safety according to latest standards

4....



### 2. Ensuring your project success

### **Project Overview**

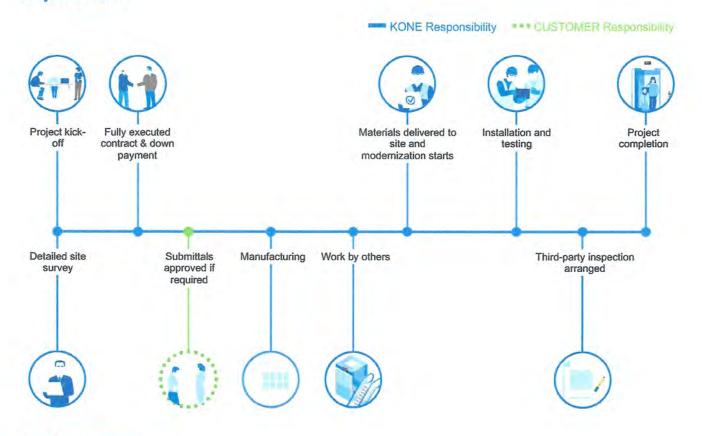

### **Site Cornerstones**

By ensuring that these cornerstones are in place you can ensure that your modernization project stays on schedule and that KONE technicians can perform their work quickly, safely, and with minimum disruption to building operations.

1

2

### Site preparation requirements before materials arrive

- · Loading and storage area of suitable size for materials, waste and waste storage, and tools
- Safe access route for new materials and materials being removed
- · Access permissions and cards or other access devices for KONE technicians

### Other works as agreed in the project plan, if not managed by KONE

Please refer to Appendix 4: Bid Attachment "B" / Site Requirements & Work by Other Trades



### 3. Your solution

Rated load Rated speed Travel height Number of floors

Rated load Rated speed Travel height Number of floors 2500 lbs 100 fpm 30 ft 0 in 4 floors / 4 front openings / 0 rear opening 2500 lbs

100 fpm 30 ft 0 in 4 floors / 4 front openings / 0 rear opening

### Electrification

#### KONE HydroMod DX

KONE HydroMod DX is a modular modernization solution for elevator control and electrical systems, based on the latest in control technology. This replaces outdated technology such as relays and older electronic systems, improving the levels of performance, reliability, safety and energy efficiency of your elevator. The modular structure of KONE HydroMod DX is designed to correctly interface with many types of existing elevator components, thus ensuring a swift, trouble-free installation for the building users.

A new microprocessor-based control system shall be provided to perform the functions of safe elevator motion. Included shall be all of the hardware required to connect, transfer and interrupt power, and to protect the motor against overloading. Each controller cabinet containing memory equipment shall be properly shielded from line pollution. The microcomputer system shall be designed to accept reprogramming with minimum system down time. All high voltage (110V or above) contact points inside the controller cabinet shall be protected from accidental contact in a situation where the controller doors are open. The microprocessor-based control system shall utilize on-board diagnostics for servicing, troubleshooting, and adjusting without requiring the use of an outside service tool.

#### KONE 24/7 Emergency Video Communications

This proposal includes provisions for KONE 24/7 Emergency Video Communications, which fully meets the intent of IBC 2018 and ASME A17.1 2019 code. In addition to the two-way audio communication, it allows for text based two-way communication between the elevator cab and the KONE Customer Care Center as well as means to visually verify if the cab is occupied when an emergency call is placed. This solution is tum-key and code compliant, and includes the following:

 Hardware that enables audio and text-based two-way communication and video into the elevator cab, including touchscreen mounted in the car operating panel, camera, and all related wiring

- Wireless communication to KONE Customer Care Center is provided by KONE. No additional data and voice network or phone line is required to be provided by others

 - 4-hour battery backup of both of in-car communication devices, wireless data, and voice network

- 24 hour-a-day, 7-day-a-week monitoring of elevator by KONE Customer Care Center

A valid service contract with KONE, including KONE 24/7 Emergency Video Communications and KONE 24/7 Connected Services, must be active. These services are included in the proposal for the duration of the warranty maintenance period (if offered). Sufficient AT&T cellular connectivity in the control space and a dedicated 110V disconnect are required to be provided by others to enable KONE 24/7 Emergency Video Communications. If the elevator has 60' of travel or more, add: A Windows-based PC that meets the requirements of 24/7 Emergency Video Communications, must be provided by others.



www.kone.us

T-0005443118



### Fixtures

### **Custom Fixtures**

New signalization shall be provided as required.

#### Doors

#### Door Panel(s)

New door panel(s) shall be provided where applicable. New door(s) shall be UL fire rated 1 1/2 hour.

### **KONE ReNova Door Operator**

A KONE ReNova closed loop permanent magnet PWM high-performance door operator shall be provided to open and close the car and hoistway doors simultaneously. Door movement shall be cushioned at both limits of travel. An electric contact shall be provided on the car at each car entrance to prevent the operation of the elevator unless the car door is closed. The door operator shall be arranged so that, in case of interruption or failure of electric power, the doors can be readily opened by hand from within the car, in accordance with applicable code.

Emergency devices and keys for opening doors from the landing shall be provided as required by the local code. Doors shall open automatically when the car has arrived at or is leveling at the respective landings. Door shall close after a predetermined time interval or immediately upon pressing of a car button. A door open button shall be provided in the car. Momentary pressing of this button shall reopen the doors and reset the time interval. Door hangers and tracks shall be provided for each car door. Tracks shall be contoured to match the hanger sheaves. The hangers shall be designed for power operation with provisions for vertical and lateral adjustment. Hanger sheaves shall have polyurethane tires and pre-lubricated sealed-for-life bearings.

### **Curtain of Light**

The elevator car shall be equipped with an electronic protective device extending the full height of the car. When activated, this sensor shall prevent the doors from closing or cause them to stop and reopen if they are in the process of closing. The doors shall remain open as long as the flow of traffic continues and shall close shortly after the last person passes through the door opening.

#### Shaft equipment

#### **Guide Shoes**

New roller guide assemblies shall be provided.







### Hydraulic equipment

### Field Pipe & Accessories

New field pipe and or accessories shall be provided as required.

### **Power Unit**

A hydraulic power unit, especially designed and manufactured for this service, will be furnished. The motor and pump will be submersed under the oil inside the tank in order to provide for sound isolation. A muffler, designed to reduce pulsation and noise which may be present in the flow of hydraulic oil, will be provided in the oil line at the top of the pump.

Control valves, including safety check valve, up direction valve with high pressure relief including up leveling and soft stop features, lowering valve including down leveling and manual leveling feature, will be mounted in a compact unit assembly. A valve, designed to shut off the flow of oil between the cylinder and the Power Unit, will be provided in the oil line in the machine room. Automatic two-way leveling will be provided to automatically stop and maintain the car approximately level with the landing, regardless of change in load.

An up traveling car will automatically descend to the lower terminal landing if the hydraulic system does not have a sufficient reservoir of oil. Power operated car and hoistway doors will automatically open at the lowest terminal landing permitting passenger egress. The doors will then automatically close and all control buttons, except the Door Open Button in the car operating panel, will be made ineffective.





### Solution details

### Elevator / Solution 1

### Electrification

Electrification		
Product name	KONE HydroMod DX	
Elevator group size	Duplex	
Code year	2019	a second second
NEMA rating (HW)	Hoistway rating is NEMA 1.	
NEMA rating (MR)	Machine room rating is NEMA 1.	
Power supply voltage [v]	480	No. of Street,
Type of power unit	Submersible	
Machine room duct	KONE will remove all existing wiring, conduit and duct from the machine room. New conduit and duct properly sized and constructed for the job requirements will be installed (in accordance with applicable codes).	
New motor size (hp)	30	
Motor Starts per Hour	80 Standard	
Card reader provisions	Controller will be equipped with card reader interface logic.	
Type of curtain of light	This curtain of light is an electronic sensing device that operates across the car entrance. When activated, the curtain of light will prevent the doors from closing or cause them to stop and reopen if they are in the process of closing. The doors will remain open as long as the flow of traffic continues and will close shortly after the last person passes through the door opening. A 3-D type will be provided.	
Qty of COPs	1	
Qty of hall call lockout switches	0	
Qty of priority service switches	0	
<b>Qty FPO Hall Stations</b>	0	
Interface to Lobby/Fire Panel	Yes	
Battery backup	Battery backup shall be provided. Batter backup allows passengers to safely exit an elevator in the event of a power outage.	
Positive Pressure Switch	Yes	
Voice annunciator	Logic will be provided for factory-programmed speech synthesizer that issues spoken messages including floor arrivals, car departures and safe use of the elevator.	



### **Product name**

KONE 24/7 Emergency Video Communications

Qty of COPs

24/7 Emergency Communications 1

24/7 Emergency Communications shall be provided.





### **Fixtures**

Product name	Custom Fixtures
Card reader provisions	Controller will be equipped with card reader interface logic.
Qty of COPs	1
Qty of new hall stations	4
Qty of retained hall stations	0
Qty of hall call lockout switches	0
Qty of new hall lanterns	0
Qty of new hall lantern/position indicator combos	1
Qty of retained hall lantern/position indicator combos	0
Qty of retained hall lanterns	0
Qty of new hall position indicators	0
Qty of retained hall position indicators	0
Qty of car direction lanterns	2
Qty of lobby/fire panels	1
Qty of retained lobby/fire panels	0
Qty of car call lockouts	0
www.kone.us	T-0005443118



Qty of hoistway access 2 switches

### Doors

Product name	Door Panel(s)	
Car panel finishing material	New car door panel(s) shall be provided where applicable. New door(s) shall be UL fire rated 1 ½ hour. Finish will be #4 stainless steel.	
Door type	Single speed center opening.	

Product name	KONE ReNova Door Operator	
NEMA rating (HW)	Hoistway rating is NEMA 1.	
Door type	Single speed center opening.	
Door package type	KONE ReNova M6 door package includes a new door operator, restrictive clutch, car door track, car gate switch, car hangers, car door panel adapters, OEM interlocks and hoistway pick up rollers.	

Product name	Curtain of Light		
Code year	2019		
NEMA rating (HW)	Hoistway rating is NEMA 1.		1.
Type of curtain of light	This curtain of light is an electronic sensing device that operates across the car entrance. When activated, the curtain of light will prevent the doors from closing or cause them to stop and reopen if they are in the process of closing. The doors will remain open as long as the flow of traffic continues and will close shortly after the last person passes through the door opening. A 3-D type will be provided.	EFFT FFT FFT FFT FFT FFT FFT FFT FFT FFT	



### Shaft equipment

Product name	Guide Shoes	
New car guide shoes	New spring dampened roller guide shoes will be provided.	
Car guide shoe type	HW #378 (Roller)	

### Hydraulic equipment

Product name	Field Pipe & Accessories
Field Pipe Length (in)	240
Field Pipe Size	2"
Isolation Coupling (Pair)	Two (2) sound isolation couplings will be provided in the oil line between the power unit and the hydraulic cylinder(s). Each coupling will consist of flanges separated by a neoprene seal to absorb vibration.
Mainline Shutoff Valves	A manual safety valve will be supplied in the oil line at the jack unit (pit) designed to shut off the flow of oil from the cylinder and bring the car to rest in case the car attains excessive down speed.
Mainline Strainer	A main line strainer will be provided in the oil line.
Seismic Rupture Valve	A rupture valve will be provided which provides protection against supply line failure that causes overspeed in the down direction.

Product name	Power Unit
Type of power unit	Submersible
New motor size (hp)	30
Motor Starts per Hour	80 Standard
Control Valve OEM	Maxton
Field Pipe Length (in)	240
Field Pipe Size	2"
Jack location	Inground
Jack type	Single Stage
Load class	Passenger
Loadweigh pressure switch	A Load Weighing device will be provided which will continuously monitor the load in the elevator car. The load-weighing device provides information necessary for the Overload Feature to operate.
Low Oil Switch	An Up traveling car will automatically descend to the lower terminal landing if the hydraulic system does not have a sufficient reservoir of oil. Power operated car and hoistway doors will automatically open at the lowest terminal landing permitting passenger egress. The doors will then automatically close and all control buttons, except the Door Open Button in the car operating panel, will be made ineffective
Oil Cooler	An oil cooler will be provided. When the oil temperature in the reservoir reaches a preset limit, it is circulated through the radiator. This process reduces the oil temperature by nearly 40°F, depending on site conditions. The oil is also filtered as it runs through the system, which results in enhanced performance and extended component life.
Overflow Connection	Yes
Positive Pressure Switch	Yes
Qty Jacks per Car	1



Seismic Rupture Valve

A rupture valve will be provided which provides protection against supply line failure that causes overspeed in the down direction.

Tank Drain Connection Yes



### Elevator / Solution 1

### Electrification

Product name	KONE HydroMod DX	
Elevator group size	Duplex	
Code year	2019	in the second
NEMA rating (HW)	Hoistway rating is NEMA 1.	
NEMA rating (MR)	Machine room rating is NEMA 1.	
Power supply voltage [v]	480	
Type of power unit	Submersible	
Machine room duct	KONE will remove all existing wiring, conduit and duct from the machine room. New conduit and duct properly sized and constructed for the job requirements will be installed (in accordance with applicable codes).	
New motor size (hp)	30	
Motor Starts per Hour	80 Standard	
Card reader provisions	Controller will be equipped with card reader interface logic.	
Type of curtain of light	This curtain of light is an electronic sensing device that operates across the car entrance. When activated, the curtain of light will prevent the doors from closing or cause them to stop and reopen if they are in the process of closing. The doors will remain open as long as the flow of traffic continues and will close shortly after the last person passes through the door opening. A 3-D type will be provided.	
Qty of COPs	1	
Qty of hall call lockout switches	0	
Qty of priority service switches	0	
Qty FPO Hall Stations	0	
Interface to Lobby/Fire Panel	Yes	
Battery backup	Battery backup shall be provided. Batter backup allows passengers to safely exit an elevator in the event of a power outage.	
Positive Pressure Switch	Yes	
Voice annunciator	Logic will be provided for factory-programmed speech synthesizer that issues spoken messages including floor arrivals, car departures and safe use of the elevator.	



Product name

KONE 24/7 Emergency Video Communications

Qty of COPs 24/7 Emergency Communications 1

24/7 Emergency Communications shall be provided.





### **Fixtures**

Product name	Custom Fixtures				
Card reader provisions	Controller will be equipped with card reader interface logic.				
Qty of COPs	1				
Qty of new hall stations	0				
Qty of retained hall stations	0				
Qty of hall call lockout switches	0				
Qty of new hall lanterns	0				
Qty of new hall lantern/position indicator combos	1				
Qty of retained hall lantern/position indicator combos	0				
Qty of retained hall lanterns	0				
Qty of new hall position indicators	0				
Qty of retained hall position indicators	0				
Qty of car direction lanterns	2				
Qty of lobby/fire panels	0				
Qty of retained lobby/fire panels	0				
Qty of car call lockouts	0				
www.kone.us	T-0005443118				



Qty of hoistway access 2 switches

### Doors

Product name	Door Panel(s)	
Car panel finishing material	New car door panel(s) shall be provided where applicable. New door(s) shall be UL fire rated 1 ½ hour. Finish will be #4 stainless steel.	
Door type	Single speed center opening.	

Product name	KONE ReNova Door Operator	
NEMA rating (HW)	Hoistway rating is NEMA 1.	
Door type	Single speed center opening.	
Door package type	KONE ReNova M6 door package includes a new door operator, restrictive clutch, car door track, car gate switch, car hangers, car door panel adapters, OEM interlocks and hoistway pick up rollers.	

Product name	Curtain of Light	
Code year NEMA rating (HW)	2019 Hoistway rating is NEMA 1.	
Type of curtain of light	This curtain of light is an electronic sensing device that operates across the car entrance. When activated, the curtain of light will prevent the doors from closing or cause them to stop and reopen if they are in the process of closing. The doors will remain open as long as the flow of traffic continues and will close shortly after the last person passes through the door opening. A 3-D type will be provided.	



### Shaft equipment

Product name	Guide Shoes
New car guide shoes	New spring dampened roller guide shoes will be provided.
Car guide shoe type	HW #378 (Roller)

### Hydraulic equipment

Product name	Field Pipe & Accessories
Field Pipe Length (in)	240
Field Pipe Size	2"
Isolation Coupling (Pair)	Two (2) sound isolation couplings will be provided in the oil line between the power unit and the hydraulic cylinder(s). Each coupling will consist of flanges separated by a neoprene seal to absorb vibration.
Mainline Shutoff Valves	A manual safety valve will be supplied in the oil line at the jack unit (pit) designed to shut off the flow of oil from the cylinder and bring the car to rest in case the car attains excessive down speed.
Mainline Strainer	A main line strainer will be provided in the oil line.
Seismic Rupture Valve	A rupture valve will be provided which provides protection against supply line failure that causes overspeed in the down direction.

Product name	Power Unit
Type of power unit	Submersible
New motor size (hp)	30
Motor Starts per Hour	80 Standard
Control Valve OEM	Maxton
Field Pipe Length (in)	240
Field Pipe Size	2"
Jack location	Inground
Jack type	Single Stage
Load class	Passenger
Loadweigh pressure switch	A Load Weighing device will be provided which will continuously monitor the load in the elevator car. The load-weighing device provides information necessary for the Overload Feature to operate.
Low Oil Switch	An Up traveling car will automatically descend to the lower terminal landing if the hydraulic system does not have a sufficient reservoir of oil. Power operated car and hoistway doors will automatically open at the lowest terminal landing permitting passenger egress. The doors will then automatically close and all control buttons, except the Door Open Button in the car operating panel, will be made ineffective
Oil Cooler	An oil cooler will be provided. When the oil temperature in the reservoir reaches a preset limit, it is circulated through the radiator. This process reduces the oil temperature by nearly 40°F, depending on site conditions. The oil is also filtered as it runs through the system, which results in enhanced performance and extended component life.
Overflow Connection	Yes
Positive Pressure Switch	Yes
Qty Jacks per Car	1



Seismic Rupture Valve

A rupture valve will be provided which provides protection against supply line failure that causes overspeed in the down direction.

Tank Drain Connection Yes



## 4. Commercial Offer

			Total Sa	ales Price, net	including TAX	\$ 282,780.18
Elevator: Solution 1	•	•	1.10		•	\$ 141,390.09
Elevator: Solution 1					•	\$ 141,390.09
Equipment	Shaft equipment	Fixtures	Doors	Electrification	Hydraulic equipment	Price (\$)
Pricing		4.5	<i>,</i> ,			
	Service sched monito KONE gener propri transla data o be the WILL DAMA EQUI INTER ERRO REAS INJUR OPER The P cover active comm For lo is con	ces be cause for luled maintenance oring devices and the right to utili ated by the use etary rights to su ates, reports or of collected, the device exclusive property BE UNINTERRUA AGES RELATINY PMENT, DUE TR ROPERABILITY DRS, INTERRUA SONABLE CONT RIES (INCLUDIN RATION OR USE Product Warranty ed under the Pro- maintenance con nences on the da ing-term reliabilit ditioned upon K	immediate serv ce visit, or other e provided to the ze 24/7 Connect and operation o uch data, nor the compiles such d vice(s) to perfon erty of KONE. K UPTED OR ERF G TO LACK OF O TAMPERING , SERVICE DEF 2TIONS OR AN TROL. KONE DI NG DEATH) ARI E OF THE SERV v is specified in B oduct Warranty of ontract. The Pro ate of acceptance ty, a continuing in ONE receiving a from ownership	ices. They sha wise at the sole customer as ted Services to f the equipment device or soft ata. KONE 24/ m the service, a ONE MAKES M ROR-FREE. KO NETWORK CO WITH THE RE FECTS, SERVI Y OTHER REA SCLAIMS ANY SING FROM CO VICES SET FO Bid Attachment on parts will on duct Warranty e set forth in the maintenance and a ten (10) year	collect, export and t. Customer has no ware that monitors 7 Connected Servi- and any software no NO WARRANTY TO DNE IS NOT LIABL DVERAGE AT THE MOTE MONITOR CE LEVELS, DEL/ SON OUTSIDE O ' LIABILITY FOR E DR IN CONNECTION RTH HEREIN. A. Installation by H ly occur while KON and Warranty Mair le Uniform Final Action	on the next IE. The remote s. Customer gives d use data o ownership or , analyzes, ces, including any elated thereto shall HAT SERVICES .E FOR ANY E SITE OF THE ING DEVICE, AYS, SERVICE F KONE'S DAMAGES OR DN WITH THE CONE of any parts IE maintains an intenance cceptance Form. sary. This Proposal Varranty
Warranty/maintenance	Our P	roposal includes	KONE 24/7 Co	nnected Servic	es for the duration	of 12 months.
Downtime period	+/-41	weeks per unit				
Handover date	Curre drawin be ext the Co transp	nt delivery lead to ngs have all bee tended because pronavirus (2019 portation restriction	time is 15 weeks n completed. Th of delays cause 3-nCoV) epidem ons imposed by	s from when one le agreed deliv d by measures ic, such as man authorities in (		t and approval of roject may need to p the spreading of rensions and untries, and the



### Additional Options for your Consideration

Alternates	Price excl. tax
Alternate 1	N/A
Alternate 2	N/A
Alternate 3	N/A
Alternate 4	N/A

Proposal pricing is based on the scope of work as defined herein. Any additional work required will be performed only upon purchaser's approval of a mutually agreeable change proposal. Any other deficiencies revealed in the progress of the work will be promptly reported to the purchaser with recommendations and cost for corrective action.

### 5. Services included

### KONE 24/7 Connected Services

KONE 24/7 Connected Services is a round-the-clock diagnostics service that gathers data on your equipment's condition. We analyze this data and use it to make intelligent and proactive decisions on how to solve any potential problems – even before they occur. KONE 24/7 Connected Services helps you to optimize the lifetime value of your assets from day one and gives you peace of mind by keeping you fully informed about the condition of your equipment and any maintenance activities we carry out.



www.kone.us

T-0005443118



### 6. Tender Approval

### KONE

Mark Adams 1501 Center Park Drive Charlotte, NC, 28217 mark.adams@kone.com

Submitted by:

Mark Adams Sr Sales Executive 03/28/2022 Owner/Representative City of High Point

Police Department 1730 Westchester Drive High Point, NC 27262

We accept the offer constituted by this proposal (total sales price of \$282,780.18, incl. use tax) and agree to the conditions contained therein.

### Approved by Customer

Printed name: Title: Company name: Date:

www.kone.us

T-0005443118



### Appendix 1: KONE 24/7 Connected Services

### KONE 24/7 Connected Services - improved safety, full transparency, and peace of mind



In addition to a quality modernization project, we would be excited to discuss KONE 24/7 Connected Services with you and the continuing benefits KONE could bring to your business. KONE is leading the industry with KONE 24/7 Connected Services using the latest intelligent elevator technology allowing us to predict issues and take action before a shutdown occurs. Predictive maintenance allows fewer shutdowns, less call-outs, and improved up-time of equipment - all leading to a better user experience!





### **Appendix 2: Clarifications**

- 1. Contract terms between KONE Inc. and Purchaser shall be based on our Proposal and Attachments "A" and "B".
- All new elevator equipment provided shall meet applicable ASME A17.1 code requirements. Any provisions of codes applicable to out-of-scope items shall be the Purchaser's responsibility. Cost of any future code changes adopted prior to permitting and completion are excluded.
- 3. Existing cab and entrance dimensions, which may not meet current ADA or stretcher access rules, will be retained as is.
- 4. Our proposal includes inspections and testing as required by the AHJ. However, any re-testing required due to other trades' failures to complete their work or tests in a timely manner will be billed at our regular billing rates.
- 5. The ASME code limits changes to the empty car weight + capacity of each elevator to 5% of the originally installed value. If past or proposed changes result in a change to the weight or system pressure (for hydraulic) greater than 5% above the original design values, the cost of any engineering and of any required modifications to the elevator system or structure shall be extra to this proposal scope and pricing. If this situation is discovered during the engineering process, KONE will notify purchaser and recommend an alternate design or other changes.
- 6. In order to provide best pricing, proposal excludes any extra demobilizations and remobilizations. If we must demobilize from the jobsite for any reason outside our control, we shall be compensated at our regular billing rates.
- 7. Proposal pricing is based on the scope of work as defined herein. Any additional work required will be performed only upon Purchaser's approval of a mutually agreeable change proposal. Any other deficiencies revealed in the progress of the work will be promptly reported to purchaser with recommendations and cost for corrective action.
- 8. Asbestos: Notwithstanding anything contained to the contrary within this bid or contract, KONE's work shall not include any abatement or disturbance of asbestos containing material (ACM) or presumed asbestos containing materials (PACM). Any work in a regulated area as defined by Section 1910 or 1926 of the Federal OSHA regulations is excluded from KONE's scope of work without an applicable change order to reflect the additional costs and time. In accordance with OSHA requirements, the Customer shall inform KONE and its employees who will perform work activities in areas which contain ACM and/ or PACM of the presence and location of ACM and/or PACM in such areas which may be contacted during work before entering the area. Other than as expressly disclosed in writing, Customer warrants that KONE's work area at all times meets applicable OSHA permissible exposure limits (PELs). KONE shall have the right to discontinue its work in any location where suspected ACM or PACM is encountered or disturbed. Any asbestos removal or abatement, or delays caused by such, required in order for KONE to perform its work shall be the Customer's sole responsibility and expense. After any removal or abatement, customer shall provide documentation that the asbestos has been abated from the KONE work area and air clearance reports shall be made available upon request prior to the start of KONE's work.
- Purchaser shall provide any security, escort or other building service support personnel required during demolition, installation, testing, and inspections.
- 10. For hydraulic elevators, we can assume no responsibility for unusual conditions such as hole cave in and complete hydraulic cylinder assembly embedded in concrete. The excavation of the hole to accommodate the new hydraulic cylinder assembly is based on encountering soil free of oil, rocks, boulders, building construction members, sand, water, quicksand, underground caves and/or any other obstructions or unusual conditions. Should such obstructions or unusual conditions be encountered, additional time above or beyond the working days estimated to complete this project may be required. We will proceed with this portion of the project on a time and material basis, based on our normal billing rates.
- Proposed solution is subject to a complete engineering review by KONE engineering team to confirm feasibility of products proposed. Additional charges may apply for work not included, but required to meet system requirements. Additional charges for this work (if applicable) shall be mutually agreed upon.



### Appendix 3: Bid Attachment "A" / KONE Inc. General Terms and Conditions (Modernization)

#### 1. APPLICATION OF THESE TERMS

The parties agree to be bound by the terms and conditions contained in the Bid Letter, this Bid Attachment A and Bid Attachment B, including the documents incorporated herein by reference (collectively, the "Proposal").

#### 2. SPECIAL PURCHASING REQUIREMENTS

This Proposal is made without regard to compliance with any special sourcing and/or manufacturing requirements including, but not limited to, Buy America, Buy American, U.S. Steel, FAR clauses, minority / disadvantaged supplier requirements or similar federal and/or state procurement laws. Should such requirements be applicable to this Project, KONE reserves the right to modify and/or withdraw its Proposal.

#### 3. PROPOSAL CONDITIONS

The Proposal shall be open for acceptance within the period stated in the Bid Letter or, when no period is stated, for a period of 30 days from the date of the Bid Letter. Prior to commencing manufacture of the equipment described in the Bid Letter ("Equipment"), KONE must have (i) a fully executed contract; (ii) a schedule acceptable to KONE identifying the Equipment installation start date, or alternatively, KONE's letter specifying the ship date ("Ship Date Letter") signed by Customer, which, as applicable, is incorporated by reference herein; (iii) the first payment in Section 4 herein; and (iv) fully approved KONE layouts.

#### 4. PAYMENT TERMS

Payment of the total Price is due within 30 days from invoice date, as follows:

- 30% of the Price for engineering, site management, and overhead, billable and due upon execution of this Proposal or receipt of the subcontract;
- 50% of the Price for material and shipping, billable and due upon delivery of material to the jobsite or KONE Distribution Center;
- 20% of the Price for Equipment installation, billable and due at the billing cycle following the start of installation.

KONE imposes a surcharge for payments made via credit card that is not greater than our cost of acceptance. The surcharge that we impose for this type of transaction is a percentage of the amount paid via credit card, which will be notified to the Customer at the payment portal. KONE reserves the right to delay, suspend, or stop the work, including manufacturing, delivery, installation and/or Equipment turnover, for non-payment, without liability to KONE or being held in default. Simple interest at 1.5% per month shall be charged on amounts not paid when due. Payments to KONE are not contingent on any third-party payments to Customer. Customer shall reimburse KONE for all costs of collection, including courts costs and reasonable attorneys' fees.

Prior to tumover, KONE must be paid in full, less 10% maximum retention, the Price including all change orders. Retention shall be due and payable within 30 days of execution of the Uniform Final Acceptance or Equipment tumover, whichever occurs first. If certified payroll reporting is required, KONE will submit the requested reporting in the format of the U.S. Department of Labor form WH 347 & WH 348. The Price does not include Textura or any other special billing requirements, which can be added via change order at a rate of 0.3% of the Price.

### 5. INSTALLATION

Customer shall be responsible for procurement and cost of all permits, except permits related to installation of the Equipment. Where KONE's scope of work or other responsibilities include the obligation to utilize materials and/or finishes resembling or identical to those pre-existing in the building, KONE shall use reasonable efforts to procure such materials and Customer acknowledges and accepts that the materials and/or finishes reasonably available may not be in all respects identical to those pre- existing in the building. This Proposal is conditioned upon KONE using its standard installation method. The installation of the Equipment shall start after Customer has completed all work set forth in Bid Attachment B and any other documents describing site requirements ("Site Requirements"), all of which are incorporated by reference herein. Within two (2) weeks prior to the scheduled delivery date for KONE's materials, KONE shall conduct a standard visual site survey to verify that the Site Requirements are complete and notify Customer if there are outstanding deficiencies preventing KONE from beginning installation.

KONE's site survey may include, but is not limited to, inspection of site access, working and safety conditions on site, wear and tear of any existing structures or surfaces, and planning of any dismaniling or removal of existing equipment, components and materials, where applicable. KONE shall not be deemed to have surveyed any hidden structures, latent defects, subsurface conditions, or other non-visible. matters, including but not limited to searching for hazardous substances and/or materials, which shall be subject to Section 16. If KONE's site survey reveals any deficiencies, KONE shall be entitled to delay the start of installation and Customer shall be responsible for all additional costs incurred by KONE, including without limitation, costs associated with: labor reallocation, re- directing materials to and storage in a KONE Distribution Center, additional labor for double handling of materials, and additional trucking, freight and insurance. Once the Site Requirements are completed, the start of installation shall be subject to the availability of labor and the delivery of material. if applicable.

KONE's work shall be performed during regular union working hours of regular working days, Monday to Friday, statutory holidays excluded. If overtime is mutually agreed upon and performed, the additional costs for such work shall be added to the Price at KONE's standard overtime rates. If the installation cannot be performed in an uninterrupted manner for any reason beyond KONE's control, Customer shall store the Equipment at Customer's cost and compensate KONE for any costs caused by such delay including, but not limited to, double handling of Equipment and demobilization. KONE shall not be required to perform overtime or any Customer directed change to its work ("Extra Work") without an executed change order. No action by KONE, including but not limited to, performing Extra Work without an executed change order, shall be a waiver of KONE's right to seek payment for Extra Work performed.

KONE shall be entitled to an extension of time and an equitable adjustment in the Price, including but not limited to, any increased costs of labor, including overtime, resulting from any change of schedule, re-direction of KONE personnel to another work area, acceleration, or out of sequence work.

KONE shall take reasonable methods to protect its work-in-place while KONE is actively on site and until execution of a KONE Uniform Final Acceptance, which is incorporated by reference herein. Should damage occur to KONE property, material or work-in-place by fire, water, theft or vandalism, Customer shall compensate KONE for said damages.

www.kone.us

T-0005443118



Additionally, the Customer is solely responsible for ensuring that the equipment maintenance contractor, if not KONE, does not disturb, delay or interfere with KONE's work. KONE shall abide by Customer's safety policies and procedures to the extent such policies and procedures are not in conflict with KONE's Safety Policy. Testing and/or security features of Equipment must be completed before Equipment turnover. KONE is not responsible for damages, either to Equipment or the building, or for any personal injury or death, arising out of or resulting from any code required safety tests performed on Equipment or hoistway access granted by Customer to other trades.

### 6. TEMPORARY USE

Temporary use of certain types of Equipment may be permitted, provided the use period allows adequate time for Equipment restoration for final turnover and Customer executes KONE's Temporary Use Agreement. Temporary use shall be invoiced separately and subject to payment terms in Section 4 herein. At the end of temporary use, Customer shall return the Equipment to KONE in "like new" condition.

#### 7. HAZARDOUS MATERIALS

KONE's work shall not include any abatement or disturbance of asbestos containing material ("ACM"), presumed asbestos containing materials ("PACM"), or other hazardous materials (i.e. lead, PCBs) (collectively "HazMat"). KONE shall have the right to discontinue its work in any location where suspected HazMat is encountered or disturbed. Any HazMat removal or abatement, or delays caused by such, required in order for KONE to perform its work shall be Customer's sole responsibility and expense. Should any HazMat abatement occur within the shaft or machine room, Customer shall execute KONE's Hoistway or Pit Access Request. If any HazMat is known to be present on site before the start of work, HazMat removal or abatement shall be completed prior to KONE scheduling installation and delivering material.

#### 8. TITLE AND RISK TO EQUIPMENT

Title to and ownership of all Equipment intended for incorporation in KONE's work, whether installed or stored on or off site, shall remain with KONE until final payment is made and, in the case of suspension or termination for non-payment, the parties agree that KONE may retake possession and remove any or all of KONE's works, Equipment or apparatus without material damage to the property and irrespective of the manner in which the same is attached or affixed. Risk of loss in KONE's work and Equipment passes to Customer upon delivery to the site or off-site storage.

Any tools, devices, or other equipment that KONE uses to perform its work or monitor the Equipment remains the sole property of KONE. If this Proposal terminates or expires for any reason, Customer will give KONE access to the premises to remove such tools, devices or equipment at KONE's expense.

#### 9. TURNOVER

Prior to turnover, KONE must receive a final punch list. Upon turnover, KONE requires a signed Uniform Final Acceptance. KONE shall provide its standard electronic O&M manuals with CD-ROMs in electronic format, if applicable, upon execution of the Uniform Final Acceptance. Standard KONE samples shall be provided upon request. No mock-ups or video training are included in the Price.

#### 10. DELAY

KONE shall not be liable for any loss, damage, claim, or delay due to any cause beyond KONE's control, including, but not limited to, acts of domestic or foreign government (including a change in law), strikes, lockouts, work interruption or other labor disturbance, delays caused by others, fire, explosion, theft, floods, inclement weather, riot, civil commotion, war, malicious mischief, infectious diseases, epidemic, pandemic, quarantine, border or port of entry and exit restrictions or acts of God. In the event of such delays, KONE shall be entitled to an extension in time equal to the length of such delay affecting KONE and an equitable adjustment in the Price. Customer shall compensate KONE for labor and material cost escalations resulting from Project delays not caused by KONE, which extend completion of KONE's work beyond the end of the current calendar year. Customer is on notice that IUEC labor rates increase annually.

#### 11. LIMITED WARRANTY

For one (1) year after the acceptance date set forth in the signed Uniform Final Acceptance, date of Equipment turnover, or date of Customer's use of Equipment (unless such use is pursuant to the Temporary Use Agreement), whichever occurs first, KONE warrants Equipment against defect in workmanship and material. The warranty excludes remedy for damage or defect caused by abuse, misuse, vandalism, neglect; repairs, alteration or modifications not executed by KONE; improper or insufficient maintenance, improper operation, characteristics of the building such as electrical power or security features, natural or other catastrophe such as flood, fire, or storm, or normal wear and tear and normal usage. The warranty excludes training or instruction in the proper operation or maintenance of Equipment. Specific noise ratings and energy efficiencies cannot be guaranteed due to different building characteristics and ambient noise levels. Customer's remedy is limited to repair or replacement of a defective part, in KONE's sole discretion, and excludes labor.

#### **12. INDEMNIFICATION**

KONE shall only indemnify and hold Customer harmless for claims, damages, losses or expenses, but excluding loss of use ("Claims") due to bodily injury, including death, or tangible property damage (other than the Project or KONE's work itself) to the extent caused by KONE's negligent acts or omissions. KONE shall not indemnify Customer for any other Claims. Customer agrees to indemnify and hold KONE harmless from any Claim for bodily injury, including death, or tangible property damage in connection with the use or operation of the Equipment. Each party shall defend itself in the event of a Claim.

#### 13. INTELLECTUAL PROPERTY

KONE shall retain title and ownership of all intellectual property rights relating (directly or indirectly) to the Equipment provided by KONE, including but not limited to software or firmware (whether in the form of source code, object code or other), drawings, technical documentation, or other technical information delivered under the Proposal. KONE grants Customer a non-exclusive and non-transferable license and right to use the software and firmware in connection with the use and maintenance of the Equipment, Customer shall not use any drawings, technical documentation or other technical information supplied by or on behalf of KONE for any purposes other than those directly related to the Proposal or to the use and maintenance of the Equipment. Customer shall not in any form copy, modify or reverse engineer the software, or give access to the software for such use to any third party without KONE's prior written consent. KONE shall not provide any information such as KONE's internal manuals, manufacturing drawings, source codes, or other proprietary and confidential information, all of which are excluded from the Proposal.



#### 14. INSURANCE

In lieu of any Customer insurance requirements, KONE shall provide Its standard certificate of insurance, which shall be deemed to satisfy all insurance requirements for this Project. KONE shall not provide loss runs, insurance rate information, copies of its insurance policies or any other information which KONE considers confidential. KONE shall not provide coverage for professional (E&O) liability, pollution liability, data privacy/security, or no-fault medical payments. If the Project is covered by a Wrap Up Insurance Program, KONE agrees to participate provided there is no cost to KONE, no reduction in the Price, and subject to KONE's review of the proposed program. The insurance requirements contained in the wrap up insurance program's manual shall govern as the only insurance requirements for this Project. In the event that the wrap up insurance program is terminated before completion of KONE's Work, KONE will provide its standard insurance certificates which shall satisfy the insurance requirements for this Project. This shall apply to the project specific Wrap Up Insurance Program's Manual and any applicable enrollment documents. If KONE's primary limits are sufficient to satisfy insurance coverage requirements, excess/umbrella liability will not be required or if excess/umbrella is required. KONE's excess coverage does not follow form although typically provides broader coverage than KONE's primary policies. The excess coverage is not AM Best Rated nor licensed to do business within the jurisdiction although the carrier has strong Standard & Poor's and Moody's financial ratings that may be evidenced upon request.

#### 15. LIMITATION OF LIABILITY

In no event shall either party be liable to the other party for any consequential, special, punitive, exemplary, liquidated, incidental, or indirect damages (including, but not limited to, loss of profits or revenue, loss of goodwill, loss of use, increase in financing costs) (collectively, "Consequential Damages") that arise out of or relate to this Proposal even if such party has been advised of the possibility of such Consequential Damages. The limitation set forth in this section shall apply whether the claim is based on contract, tort or other theory.

### **16. CONCEALED OR UNKNOWN CONDITIONS**

If during the course of its work, KONE encounters conditions at the site that are subsurface, differ materially from what is represented in the contract documents, or otherwise concealed physical conditions, KONE shall be entitled to an extension of time and additional costs for the performance of its work, which shall not be subject to any payment conditions or contingencies.

#### **17. TECHNICAL SURVEY**

KONE's Price and obligations under this Proposal are subject to a technical survey to be performed on Customer's existing units within 90-days of the effective contract start date. If a safety hazard or code violation is identified during KONE's technical survey, Customer shall immediately remove the unit from service until repairs are performed. KONE is not obligated to perform tests, correct outstanding violations or deficiencies that were not addressed by the prior service provider and/or the owner, or make related necessary repairs or component replacements on the unit. If additional work is necessary, KONE shall provide a separate proposal or recommendation for such work. Customer agrees to indemnify, defend, and hold KONE harmless for any claims arising out of Customer's failure to comply with KONE's recommendations and proposal, and any obligation on the part of KONE to indemnify or defend Customer with regard to such claim shall be null and void. If Customer does not immediately approve KONE's proposal or recommendation, KONE reserves the right to terminate this Proposal/contract without penalty

#### **18. TERMINATION**

If a party materially breaches this Proposal, the other party shall provide written notice of the breach and a reasonable time to cure the breach, but in no event less than 30 days. If the breaching party fails to cure the breach within the specified time period, the non-breaching party may terminate the Proposal upon 15 days written notice to the other party. If KONE notifies Customer of a material breach pursuant to this paragraph, KONE may temporarily suspend its work without liability.

#### 19. GOVERNING LAW AND DISPUTE RESOLUTION

The parties agree that this Proposal shall be governed by the laws of the state where the Project is located, and venue for disputes shall be located in that state. KONE does not agree to participate in arbitration proceedings.

### 20. PRICE ADJUSTMENT

KONE shall be entitled to an equitable adjustment in the Price, including but not limited to, any increased costs of materials, resulting from any change in law (by legislation, executive order, treaty or other similar means), or a change in law that imposes tariffs on raw materials or finished goods.

#### 21. MISCELLANEOUS

This Proposal, including the documents incorporated herein by reference, constitutes the entire agreement of the parties and supersedes all prior negotiations, understandings, and representations whether written or oral in relation to the subject matter hereof. Where a conflict or ambiguity exists between this Proposal and any other contract document (including but not limited to, Customer's drawings and specifications), the terms and conditions of this Proposal shall control. This Proposal may be amended only in writing by the duly authorized representative of both parties. This Proposal may be executed in one or more counterparts. Each counterpart shall be considered an original and all of the counterparts shall constitute a single agreement binding all the parties as if all had signed a single document. For purposes of executing this Proposal, a document signed by electronic means is to be treated as an original document. The failure of either party to insist upon performance or strict performance of any of the terms or conditions of this Proposal shall not be deemed a waiver of any rights or remedies that such party may have or a waiver of any subsequent breach or default under this Proposal. Neither party may assign or transfer the benefit or burden of this Proposal without prior written consent of the other party.



### Appendix 4: Bid Attachment "B" / Site Requirements & Work by Other Trades

The work described below is a summary of work to be performed by others ("Work by Other Trades") that may be required in conjunction with the elevator modernization performed by KONE (the "Work"). Purchaser shall provide any and all building electrical, structural and mechanical system upgrades required for code compliance, life safety, and proper equipment installation and operation. The Authorities Having Jurisdiction (AHJ) may require additional remedial or preparatory work. All required remedial or preparatory work shall be performed by properly licensed trade contractors in compliance with applicable codes and based on a schedule of performance that allows for uninterrupted progress of the Work. Under no circumstances shall KONE be responsible for any cost associated with the performance of remedial work by others. Purchaser shall provide the following unless specifically included in KONE's Work:

### 1. ELECTRICAL

- A properly rated three phase fused disconnect switch. externally operable and lockable in the open position, located as required by code. Accommodate any increases 3. HOISTWAY in motor size or feeder loads.
- A dedicated 110 VAC fused disconnect switch, externally operable and lockable in the open position adjacent to the machine room door for cab lighting and ventilation, located as required by code.
- Shunt-trip disconnect if fire sprinklers are present in 0 machine room or hoistway.
- GFI 120 VAC convenience outlets in machine room and Θ. pit.
- Separate outlet in the pit area if a sump pump is installed.
- Telephone line service brought to the elevator machine room for emergency communication device.
- Any required RF shielding of TV or radio transmitters, antennae and/or wave-guides.
- Conduit with pull boxes from each elevator bank to any remote fire control or communication panels specified.
- Provide a separate 15-amp, 115 VAC fused service with ground (powered by building emergency power system. when available) for KONE 24/7 Emergency Communications, when specified. Must include the means to disconnect each service and lock-off in the "open" position (NFPA 70 article 620.22 and 620.53 or CEC article 38.22 and 38.53).

If required by building code: standby/emergency power, sufficiently sized to provide power of permanent characteristics to each elevator's disconnect, simultaneously, upon loss of regular power, including feeders, transfer switches and auxiliary contact signal outputs to elevator controllers.

### 2. MACHINE ROOM

- A code-compliant machine room. Provide or maintain fire ω. rating as required by building code.
- Fire-rated door for access into the machine room. Door shall be self-closing and self-locking, operable from inside the room without the use of a key.
- Independent ventilation or an air conditioning system for the elevator machine room, to assure temperature is maintained between 65 degrees and 95 degrees Fahrenheit.
- Fire extinguisher inside machine room.
- Minimum clear machine room height of 7'-0" .
- Suitable lighting that provides a minimum of 19 ftc at floor. .
- Removal of any non-elevator related equipment and materials from within the machine room and proper disposal of oil and other hazardous or non-hazardous substances and materials.

- A code-compliant hoistway, constructed in accordance . with KONE's requirements and specifications. Provide or maintain fire rating as required by building code.
- Patching of all holes in hoistway walls with fire rated material.
- Beveling all ledges within hoistway measuring over 4".
- Removal of any non-elevator related equipment and materials from within the hoistway and proper disposal of oil and other hazardous or non-hazardous substances and materials
- A guarded light fixture and light switch in pit. Switch must be located 42" above the lowest landing floor level.
- A means of displacing water located in the pit and containing and disposing of oil, chemicals, and other substances in compliance with environmental laws and regulations (KONE assumes no responsibility for discharge of oil, chemicals, and other substances into storm water systems, sanitary sewer systems, retention ponds, etc.). Elevator hoistway ventilation to the outside atmosphere as required by building code.

### 4. FIRE SERVICE

- Fire alarm smoke detectors with wiring and relays in the machine room terminating at elevator controller.
- Fire alarm initiating devices must be located in front of each elevator entrance as well as in the machine room and at the top of the hoistway.
- Where sprinklers exist in the machine room and/or hoistway, a fire alarm initiating device within 12" of each sprinkler head.



### 5. ACCESS INTEGRATION/SECURITY

- Our proposal includes KONE logic and provisions for the specified Touchscreen(s), Keypad Destination Operating Panel(s), Monitoring System(s) and Multi-Media Equipment.
- Card Readers and/or any additional required hardware & software for proper functionality of access control/security system(s) shall be furnished and installed by others.
- Any required software to ensure proper communication between KONE control system(s) and building system(s) shall be the responsibility of others.
- A designated 115V 15A circuit is required at each of the remote monitoring stations.
- KONE recommends a minimum 100 Mbit/s Ethernet for each of the following application(s): Integrated Touchscreen/Keypad Destination Operating Panels, Monitoring System. Multi-Media Equipment, and Card Readers.

### 6. COUNTERWEIGHTING

 Pricing is based upon the existing car to counterweight weight ratio being consistent with elevator industry standards. This is defined as the counterweight weight being equal to the empty car weight plus 40%. The actual assemblies will be weighed during the modernization process. If modifications are required to correct the existing weight balance, these modifications will be provided at additional cost.

### 7. RK1 FUSES AND CIRCUIT BREAKERS

 Fuses are to be current limiting class RK1 or equivalent. Circuit breakers are to have current limiting characteristics equivalent to RK1 fuses. Provisions of these fuses are the responsibility of others, not KONE.

### 8. GENERAL

- Access to the building to perform the Work and for deliveries with dry, protected storage adjacent to the hoistway.
- Cutting of existing walls, floors and finishes, together with all repairs made necessary by such cutting or changes, e.g. cutting of lobby walls for flush hall fixtures and removal of encroaching lobby features such as wallmounted ashtrays. Removal, replacement, and/or repair of any mirrors, millwork, plaster, stone or other special hall finishes.
- All work of other trades must be complete and ready at time of first elevator inspection, or elevator will not be released for operation by the AHJ. If the AHJ does allow temporary operation under a Temporary Operating Inspection (TOI), any associated costs shall be Purchaser's responsibility.
- Our tender is based on suitable site conditions, material and tooling storage space, and bathroom access being available on site.
- Safe working environment must be provided and supported by provision for adequate entrance protection, means of hoisting, hoistway dividing screens, and protection of floors walls and doors etc.
- Emergency evacuation procedures to be clearly defined where required. Subject to site survey and actions agreed.
- Any portion of the Work that is subject to the permissions of local authorities beyond the elevator permits must be identified to KONE. Responsibility for permits to be agreed. Permits and appropriate signage indicating any changes to pedestrian access routes for building users must be in place prior to start of the Work.
- Elevator installation methods requires the integrity of the existing Safety Gear and Overspeed protection devices, and are therefore subject to verification of suitability prior to commencement of the work. Any remedial work required or alternative solution is not included in this tender.